

MOOER

**PRIME P1
INTELLIGENT PEDAL**

Owner's Manual

Content

Precautions-----	01
Features-----	02
Layout-----	03-04
Instructions-----	05-06
Connection-----	07-08
Tone-----	09-16
Specification-----	17

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power Supply

- Please use a power supply that meets UL, CSA, VED, or CCC standards
- Please use the power supply that meets manufacturer's power requirement
- Please unplug the power supply when the device is turned off or during a thunderstorm
- Please do not expose the device which has battery power to heat or let it overheat
- If battery leakage occurs, please do not touch the liquid with your skin or eye. If you do come in contact, please see a doctor
- The battery included with the device may cause fire or chemical burns if handled improperly

Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Excessive dusty or dirty location
- High humidity or moisture
- Extreme temperature or humidity
- Magnetic fields
- Strong vibrations or shocks


Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth. Do not use abrasive cleanser, cleaning alcohol, paint

Features

- Eliminates the need to carry a massive power supply or deal with complicated user interfaces. Simply set up your effects chain and jump into your practice session or performance.
- Based on MOOER's unique MNRS technology, allowing for high-quality digital amp models and effects with a small form factor.
- Supports USB-OTG for live streaming or quick video recording.
- Download the free mobile app to easily edit your tones and share them with others as well as download different effects modules and tools to expand your own tonal possibilities
- Supports MOOER F-series wireless footswitches for preset switching and looper/drum machine control.
- Bluetooth audio playback for practice and jamming.

Layout

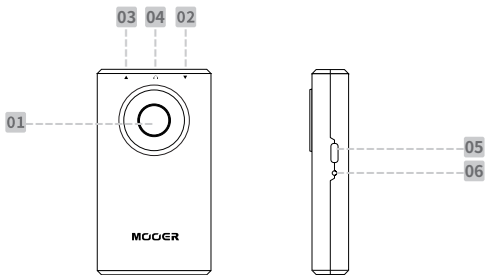

01. CONTROL

Control Knob with LED indicator. Rotate to adjust volume level. Press to switch between different preset patches.

02. INPUT

Input jack for instruments

03. OUTPUT

Output jack for main output

04. PHONES

Headphone output jack

05. USB

USB charging/OTG port

06. LED

Charging Indicator

Instructions

01. ON/OFF

Press and hold the Control button to power on/off the unit. The button LED will be turned on or off to indicate current status..

02. Select Preset Tone

Press the CONTROL knob to switch between A/B/C/D preset patches. The LED of the CONTROL knob will turn Blue/Green/Yellow/Red to indicate the selected preset.

03. Adjust Output Volume Level

When the device is on, rotate the CONTROL knob to adjust the output level of the unit. The brightness of the LED will indicate the volume level, with brighter corresponding to a higher volume level.

04. Bluetooth Playback

Turn on the Bluetooth function of your phone and select "Prime Audio" to pair. You can then play the audio track from your phone with the Prime P1 directly.

05. USB Audio

Prime P1 support OTG function to work with smart phone/tablet for direct recording.

*Notes: Please use USB-C to USB-A cable for OTG recording.

06. Charging

Prime P1 has a built-in rechargeable lithium-ion battery. When the battery life is low, the LED of the CONTROL knob will blink slowly. The Prime P1 supports charging via smart phone adaptor/power bank/USB port of computer. While charging, the charging indicator will turn on with Red indicating charging and Green to indicate charging complete.

*Notes: Please use USB-C to USB-A cable to charge.

07. Wireless Footswitch (Purchase separately)


Prime P1 supports MOOER F-series wireless footswitch. Users can utilize the wireless footswitch to control many functions of the unit. Before using the wireless footswitch for the first time, you must pair it with the Prime P1. Please check out the " ? " on the Prime App home page on pairing under "Pedal Connection"

08. Prime App


Users can download and install the Prime App to their mobile device from the Google Play/iOS application store. Users can edit preset patches, share tones with other users, or use the built-in tools such as tuner/drum machine/metronome/looper. Apart from that, you can download and install different effects modules in the Prime App and apply them to your P1. For more information, please download and install the Prime App.

Connection

Normal

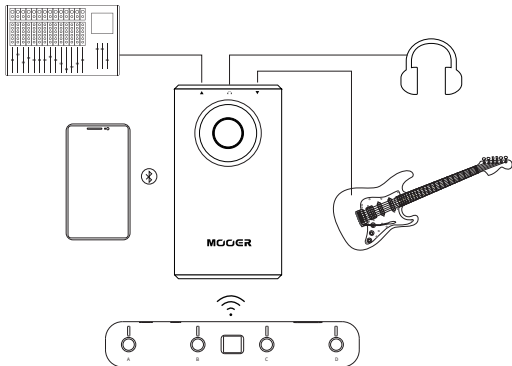

USB Recording

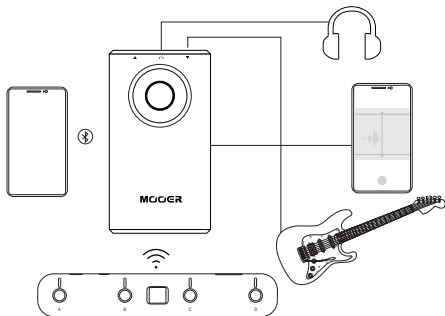

STONE

OD

serial number	name	serial number
1	Pure Boost	Based on MOOER@ Pure Boost effect
2	Flex Boost	Based on MOOER@ Flex Boost effect
3	Tube DR	Based on BK.Butler@ Tubedriver overdrive effect
4	808	Based on Ibanez@ TS808 overdrive effect
5	Gold Clon	Based on Klon Centaur@ Gold overdrive effect
6	D-Drive	Based on Barber@ Direct Drive overdrive effect
7	Jimmy OD	Based on Paul Cochrane@ Timmy OD overdrive effect
8	Full DR	Based on Fulltone@ Fulldrive 2 overdrive effect
9	Beebee+	Based on Xotic@ BB Plus overdrive distortion effect
10	Black Rat	Based on Proco@ Rat distortion effect
11	Grey Faze	Based on Dunlop@ Fuzz Face fuzz effect
12	Muffy	Based on EH@ Big Muff fuzz effect
13	Full DS	Based on Fulltone GT-500 distortion effect
14	Shred	Based on Marshall@ Shred Master distortion effect
15	Riet	Based on Suhr@ Riot distortion effect
16	MTL Zone	Based on Boss@ Metal Zone effect
17	Obsessive Dist	Based on Fulltone@ OCD distortion effect

AMP

serial number	name	serial number
1	65 US DLX	Based on Fender@65 Delux Reverb preamp module
2	65 US TW	Based on Fender@65 Twin Reverb preamp module
3	59 US Bass	Based on Fender@ 59 Bassman preamp module
4	US Sonic	Based on Fender@ Super Sonic preamp module
5	US Blue CL	Based on Fender@ Blues Deluxe preamp module clean channel
6	US Blue OD	Based on Fender@ Blues Deluxe preamp module overdrive channel
7	E 650 CL	Based on ENGL@ E650 preamp module clean channel
8	Powerbell CL	Based on ENGL@ E645 preamp module clean channel
9	Blacknight CL	Based on ENGL@ E650 Blackmore Signature preamp module clean channel
10	Mark III CL	Based on Mesa/Boogie@ Mark III preamp module clean channel
11	Mark V CL	Based on Mesa/Boogie@ Mark V preamp module clean channel
12	Tri Rec CL	Based on Mesa/Boogie@ Triple Rectifier preamp module clean channel
13	Rockvrb CL	Based on Orange@ Rockverb preamp module clean channel
14	Dr Zee Reck	Based on DR.Z@ Z-Wreck preamp module
15	Jet 100H CL	Based on Jet City@ JCA100H preamp module clean channel
16	Jazz 120	Based on Roland@ JC120 preamp module
17	UK 30 CL	Based on Vox AC30 preamp module clean setup
18	UK 30 OD	Based on Vox AC30 preamp module overdrive setup

AMP

serial number	name	serial number
19	HWT 103	Based on Hiwatt@ DR-103 preamp module
20	PV5050 CL	Based on Peavey@ 5150 preamp module clean channel
21	Regal Tone CL	Based on Tone King@ Falcon preamp module Rhythm channel
22	Regal Tone OD1	Based on Tone King@ Falcon preamp module Tweed channel
23	Carol CL	Based on Two Rock@ Coral preamp module clean channel
24	Cardeff	Based on Two Rock@ Cardiff preamp module
25	EV 5050 CL	Based on EVH@ 5150 preamp module clean channel
26	HT Club CL	Based on Blackstar@ HT Stage100 preamp module clean channel
27	Hugen CL	Based on Diezel@ Hagen preamp module clean channel
28	Koche OD	Based on Koch@ Powertone preamp module overdrive channel
29	J800	Based on Marshall@ JCM800 preamp module
30	J900	Based on Marshall@ JCM900 preamp module
31	PLX 100	Based on Marshall@ Plexi 100 preamp module
32	E650 DS	Based on ENGL@ E650 preamp module distortion channel
33	Powerbell DS	Based on ENGL@ E645 preamp module distortion channel
34	Blacknight DS	Based on ENGL@ 650 Blackmore Signature style preamp module distortion channel
35	Mark III DS	Based on Mesa/Boogie@ Mark III preamp module distortion channel
36	Mark V DS	Based on Orange Rockverb@ preamp module distortion channel

AMP

serial number	name	serial number
37	Tri Rec DS	Based on Mesa/Boogie@ Triple Rectifier preamp module distortion channel
38	Rockverb DS	Based on Orange@ Rockverb preamp module distortion channel
39	Citrus 30	Based on Orange@ AD30 preamp module
40	Citrus 50	Based on Orange@ AD50 preamp module
41	Slow 100 CR	Based on Soldano@ SLO 100 preamp module crunch channel
42	Slow 100 DS	Based on Soldano@ SLO100 preamp module distortion channel
43	Jet 100H OD	Based on Jet City@ JCA100 H preamp module overdrive channel
44	PV 5050 DS	Based on Peavey@ 5150 preamp module distortion channel
45	Regal Tone OD2	Based on Tone King@ Falcon preamp module Lead channel
46	Carol OD	Based on Two Rock@ Coral preamp module overdrive channel
47	EV 5050 DS	Based on EVH@ 5150 preamp module distortion channel
48	HT Club DS	Based on Blackstar@ HT Stage 100 preamp module distortion channel
49	Hugen OD	Based on Diezel@ Hagen preamp module overdrive channel
50	Hugen DS	Based on Diezel@ Hagen preamp module distortion channel
51	Koche DS	Based on Koch@ Powertone preamp module distortion channel

CAB

serial number	name	serial number
1	Regal Tone 110	Based on Tone King@ Falcon 110 cabinet
2	US DLX 112	Based on Fender@ Deluxe Reverb 112 cabinet
3	Sonic 112	Based on Fender@ Super Sonic 112 cabinet
4	Blues 112	Based on Fender@ Blues Deluxe 112 cabinet
5	Mark 112	Based on Mesa/Boogie@ Mark 112 cabinet
6	Dr Zee 112	Based on DR.Z@ Maz112 cabinet
7	Cardeff 112	Based on Two Rock@ 112 cabinet
8	US TW 212	Based on Fender@ Twin Reverb 212 cabinet
9	Citrus 212	Based on Orange@ PC 212 cabinet
10	Dr Zee 212	Based on DR.Z@ Z-Wreck212 cabinet
11	Jazz 212	Based on Roland JC120 212 cabinet
12	US Bass 410	Based on Fender@ Bassman 410 cabinet
13	1960 412	Based on Marshall@ 1960 A 412 cabinet
14	Eagle S412	Based on ENGL@ Vintage XXL 412 cabinet
15	Rec 412	Based on Mesa/Boogie@ Rectifier 412 cabinet
16	Citrus 412	Based on Orange@ PC 412 cabinet
17	Slow 412	Based on Soldano@ SLO 412 cabinet
18	HWT 412	Based on Hiwatt@ AP 412 cabinet

CAB

serial number	name	serial number
19	PV 5050 412	Based on Peavey@ 5150 412 cabinet
20	EV 5050 412	Based on EVH@ 5150 412 cabinet
21	HT 412	Based on Blackstar@ HTV 412 cabinet
22	Diesel 412	Based on Diezel@ Hagen 412 cabinet

DYNA

serial number	name	serial number
19	NG	Based on MOOER@ Nosie Killer noise gate
20	Comp	Based on MOOER@ Blue Comp compressor effect
21	Touch Wah	Based on MOOER@ Envelope fliter effect
22	Auto Wah	Based on MOOER@ WAH auto wah effect

MOD

serial number	name	serial number
1	Phaser	liquid like phaser effect
2	Step Phaser	Based on square wave phaser effect
3	Flanger	Classic flanger effect
4	Jet Flanger	Based on the MOOER@ JET FLANGER
5	Tremolo	Tremolo effect with periodically changing volume level
6	Stutter	Stutter effect with periodically changing volume level
7	Vibrato	Vibrato effect with periodically changing pitch
8	Pitch Shift	Effect for changing the pitch
9	Rotary	Rotary effect
10	Ana Chorus	Warm analog like chorus effect
11	Tri Chorus	Modern multi chorus effect
12	Ring	Can produce the ring like tone

DELAY

serial number	name	serial number
1	Digital	Clear and precise digital delay effect
2	Analog	Classic warm analog like delay
3	Real Echo	Real space like delay effect
4	Tape	Vintage tape delay effect
5	Mod	Delay with modulation effect
6	Reverse	Delay with reversed signal

REVERB

serial number	name	serial number
1	Room	Small room reverb
2	Hall	Concert Hall reverb
3	Plate	Studio style plate reverb
4	Spring	Vintage spring reverb tank
5	Mod	Reverb with modulation effect

Specifications

Input:	1/4" 2 M Ω
Output:	1/4" 100 Ω
Headphone output:	1/8" 32 Ω
USB cable type:	USB-C to USB-A cable
Bluetooth version:	5.0
Battery Capacity:	1900mAh
Battery Life:	4.5 hours
Charging Requirement:	DC 5V/1A
Wireless Control:	2.4G
Weight:	100g
Dimensions:	99.3mm (D) * 55mm (W) * 21mm (H)
Accessories:	Quick guide, USB-C to USB-A cable, Nylon bag.

***Disclaimer: Parameter updates will not be notified separately.**

MOOER
www.moeraudio.com

SHENZHEN MOOER AUDIO CO. LTD
6F, Unit D, Jinghang Building, Liuxian 3rd Road,
Bao'an 71 District, Shenzhen, China. 518133
Made in China